

We have the solution to your resin problems!

The resin coating doesn't have to be chipped of any more.

Just spray an environment friendly sugar tenside on the resin layer and flush it clean.


Uptime and **sawing precision** are increased when saw blades and saw guides are cleaned on a regular basis.

Example

The protecting plate has got a 1 cm thick coating of resin and saw dust.



The resin is sprayed with approximately 2 litres **Aricur** per square meter.

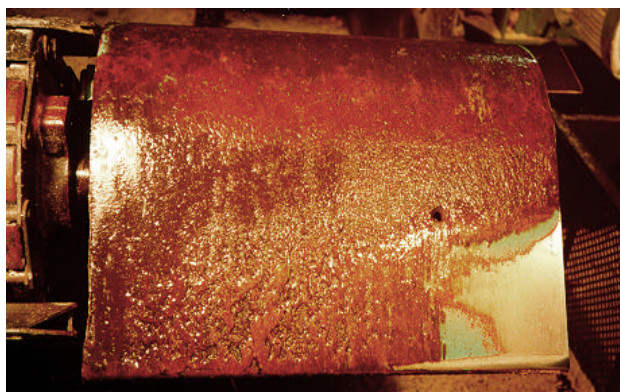

After a couple of minutes the resin swells and comes loose from the surface and can easily be flushed or scraped off.

Old resin may need repeated treatment.



The plate is completely free from resin after flushing. The resin does not dissolve and can easily be collected.

Packing sizes

Aricur is sold ready in 25 or 100 l. containers. Other sizes on request.

References

Wiking Timber AB, Gualöv Sawmill
Bo Nilsson

Alvesta Träförädling, Lars Dahl

Graninge, Rundviks Sawmill
Magnus Karlsson