


Pressure Rail, for short logs

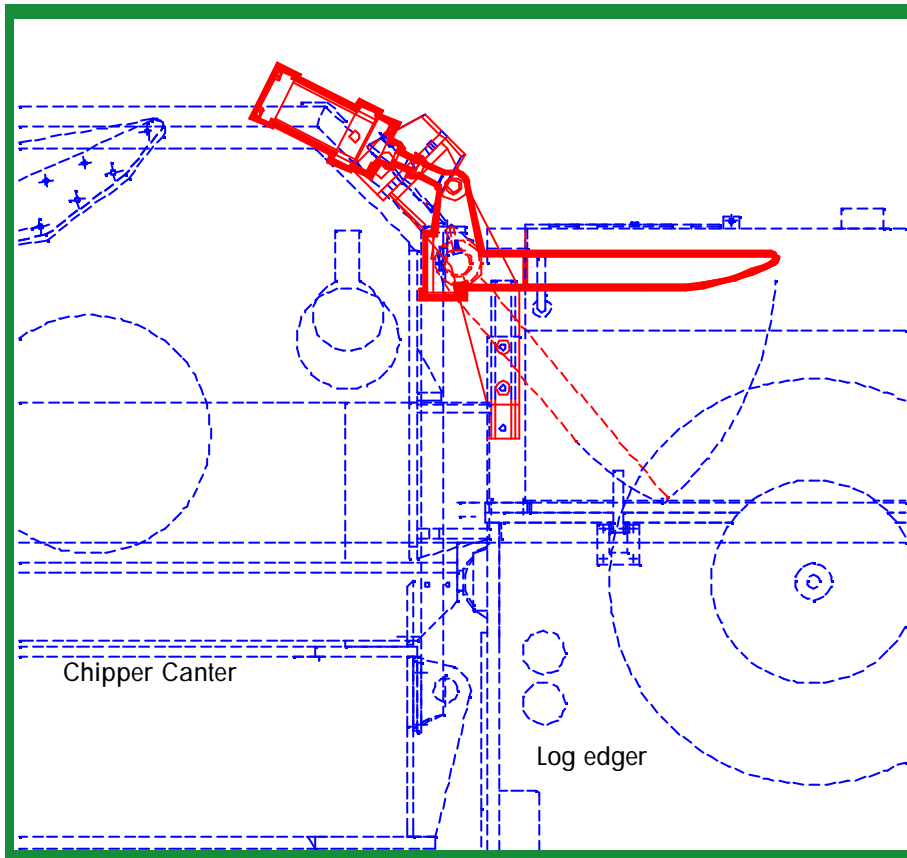

Problem-free sawing is always something desirable and profitable!

When sawing short logs it can often be problems if the pressure wheel on the outfeeding side not is down before the log has left the Chipper Canter. The log can skid on the chain and stop between the sawblades in the KS. That means a big risk for throw back and damages.

An excellent way to prevent this, is to install a pressure rail in the log edger. The pressure rail is steered by an air

cylinder and valve, and is mounted on the Chipper Canter.

For more information please contact AriVislanda After Sales department.



Örnsköldsvik Vislanda
 Tel: +46 660-868 00 Tel: +46 472-343 45
 Fax: +46 660-199 22 Fax: +46472-343 49
 E-mail: info@arivislanda.com
 Internet: www.arivislanda.com