


Feedwork HM-600



- ✓ Higher flexibility
- ✓ Secure feeding

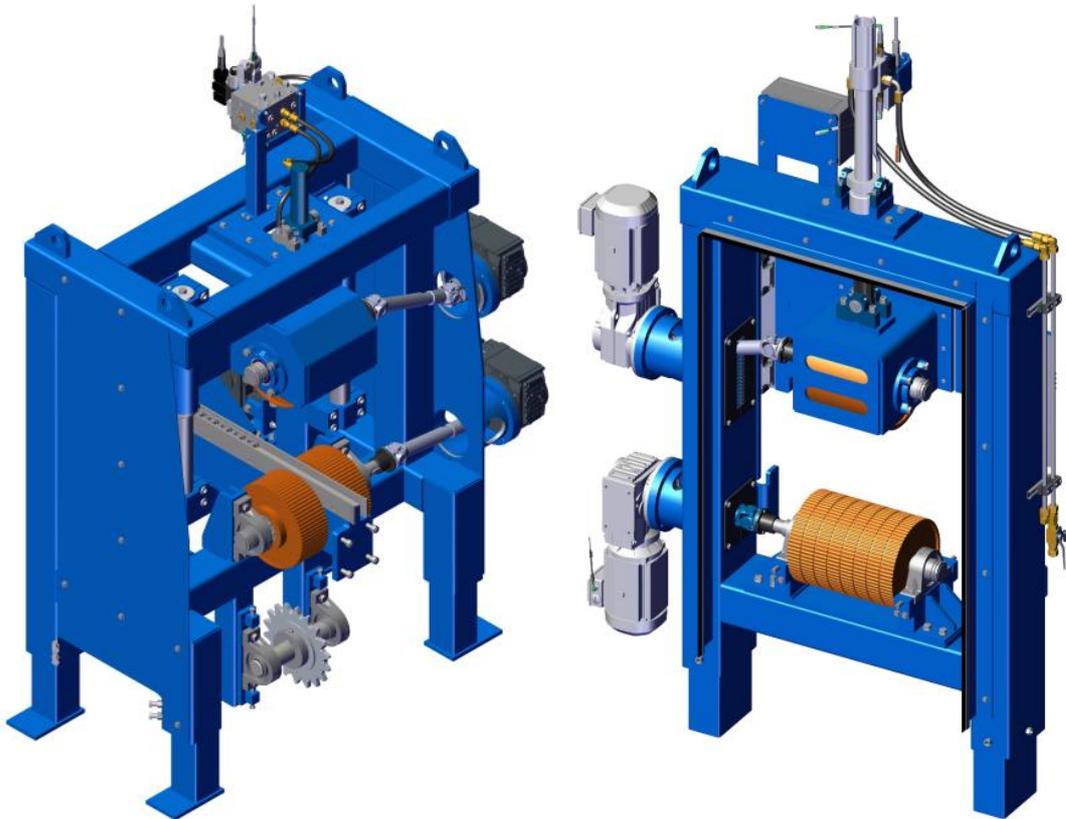

HM-600 is a feedwork with horizontal rollers, designed to help support the cant through the sawline. Complements a standard line to allow processing of shorter logs than standard.

The machine features a stand of square tubing and has one pair of driven horizontal rollers to support and feed the cant. Each roller has an independent electric drive connected via cardan shaft. The top roller runs on a linear guide system and is positioned with a hydraulic cylinder with position sensing.

As an option the **HM-600** is available with drive- or return unit for the feed chain for the sawline.

Technical data / Power requirement

Max feed speed	180 m/min
Min/Max cant height.....	60/350 mm
Power requirement feed rollers	2x3 kW
Weight.....	app 0,9-1,5 ton

