Feedwork SP-600

- ✓ Higher flexibility
- ✓ Secure feeding

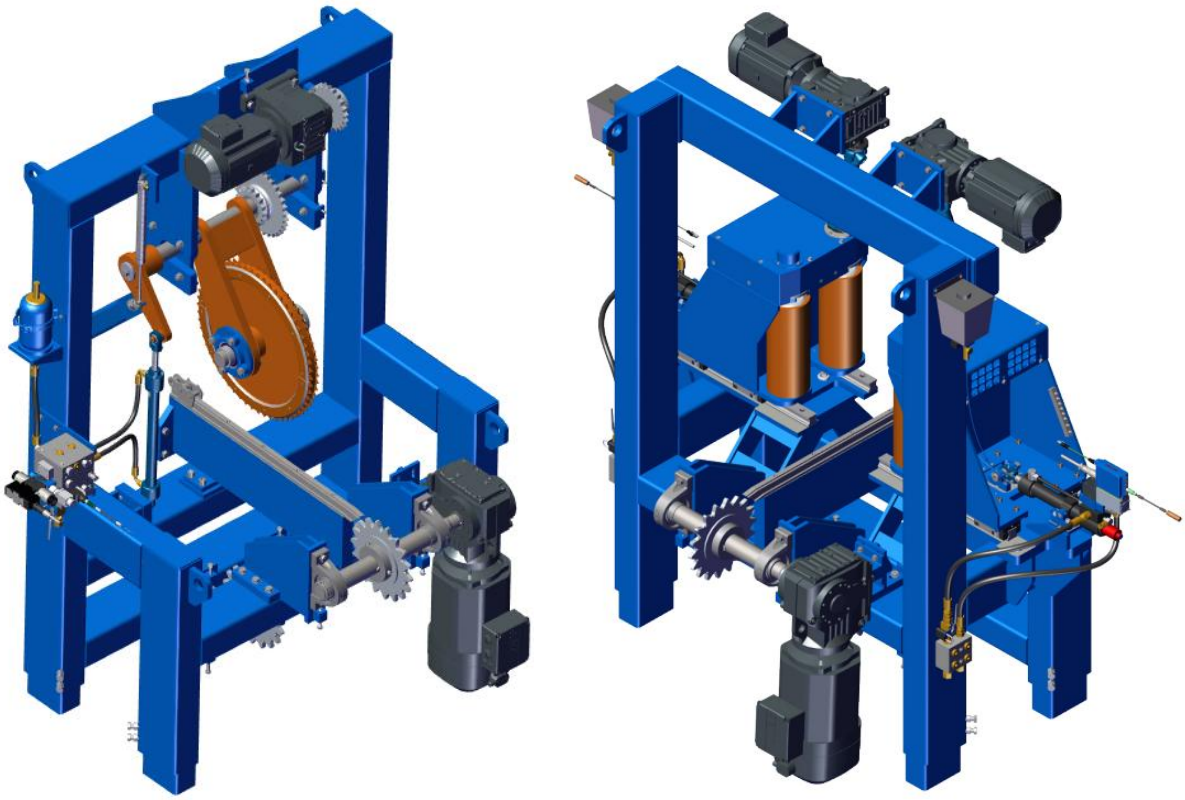

SP-600 is an outfeed unit designed to help feed the log out of the first chipper canter.

The machine features a stand of square tubing with a center rail and a drive unit for the feed chain of the sawline. Depending on the application, it is equipped either with side rollers or an overhead pressure wheel. Both options have electric drive.

Technical data / Power requirement

Max feed speed	180 m/min
Min/Max log diameter	100/600 mm
Power requirement; Side rollers	2x3 kW
Pressure wheel	3 kW
Feed chain	7,5 kW
Weight	app 1,2-1,7 ton

AriVislanda, Olvägen 4, SE-342 50, +46472-343 45, www.arivislanda.com