


Feedwork VFW-50



- ✓ Proven design
- ✓ Stable feeding

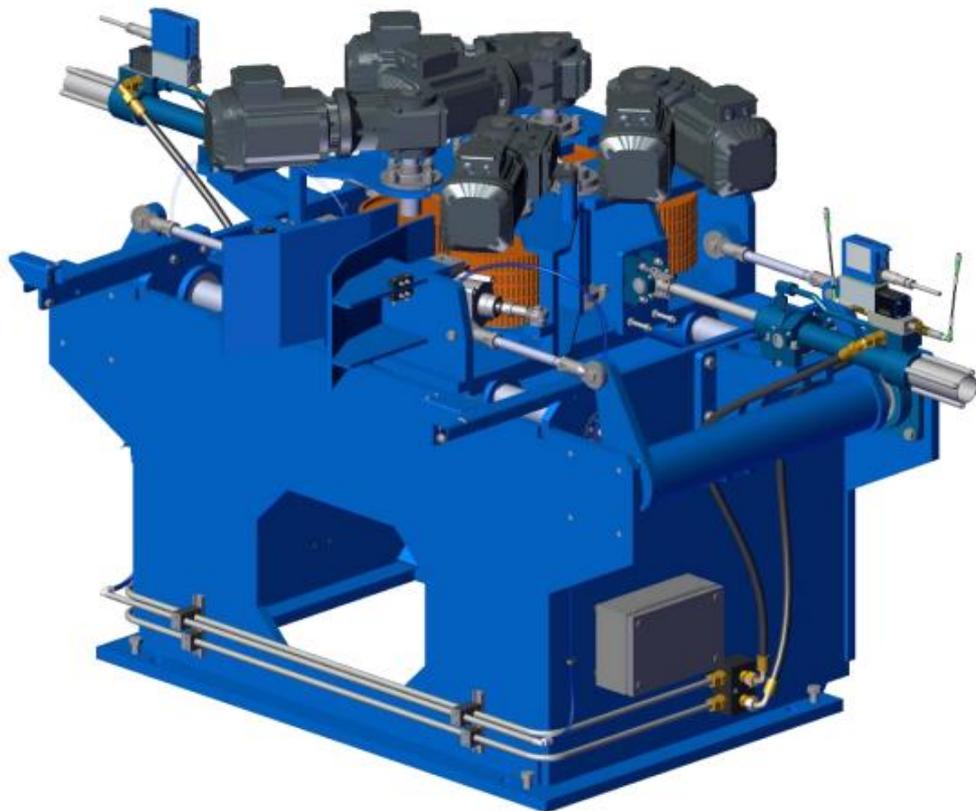

VFW-50 is a feedwork designed to feed four-sided reduced cants in to the gang saw. It can be utilized both for centered and laterally displaced infeed of the cants.

The machine is constructed of heavy-duty steel plate and features a box-shaped frame with two moveable consoles with pivoted cradles mounted to them. The consoles slide on a round guide system and are controlled by servohydraulic cylinders. The pivoted cradles have pneumatic actuators and enable the feedwork to be utilized for both straight sawing and mechanical curve sawing.

Each half is equipped with two feed rollers with separate electrical motors.




VFW-50



- Proven design
- Centered and off-centre infeed of the cant

Measurements

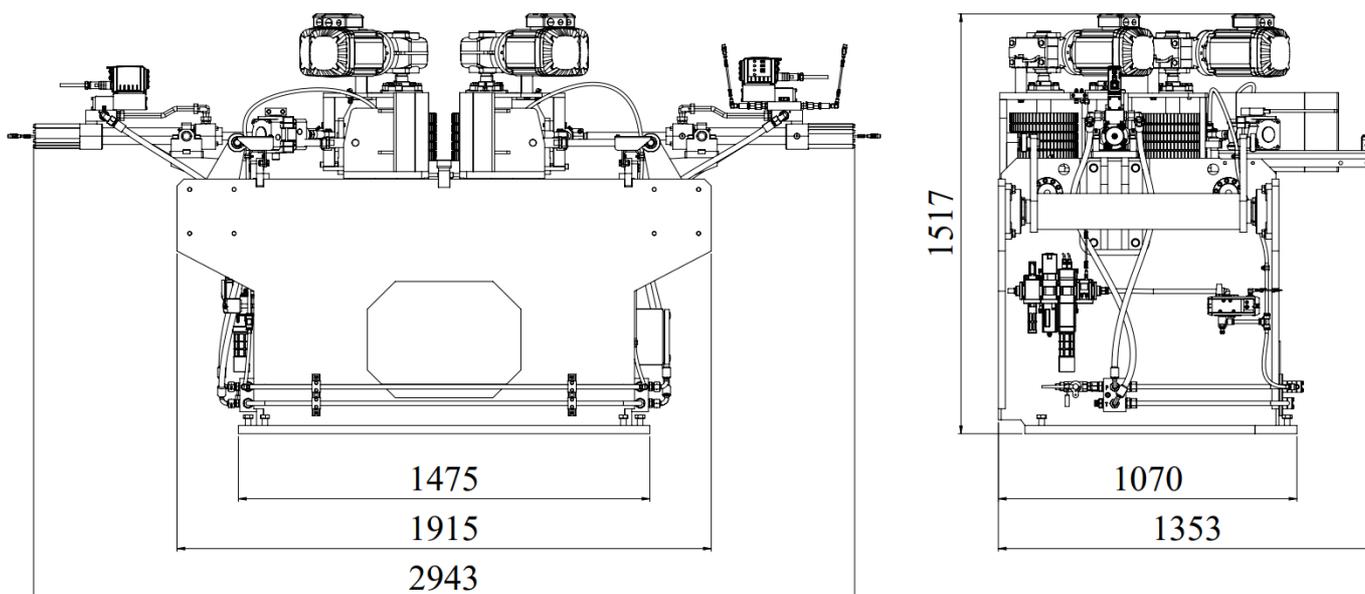

Technical data

Max feed speed	200 m/min
Min/Max cant height.....	75/350 mm
Min/Max cant width	70/600 mm
Power requirement feedrollers.....	4x1,5 kW
Weight.....	app 2,5 ton

