


Log turner VLT-600



- ✓ Compact machine
- ✓ High measurement accuracy
- ✓ Effective with shorter logs

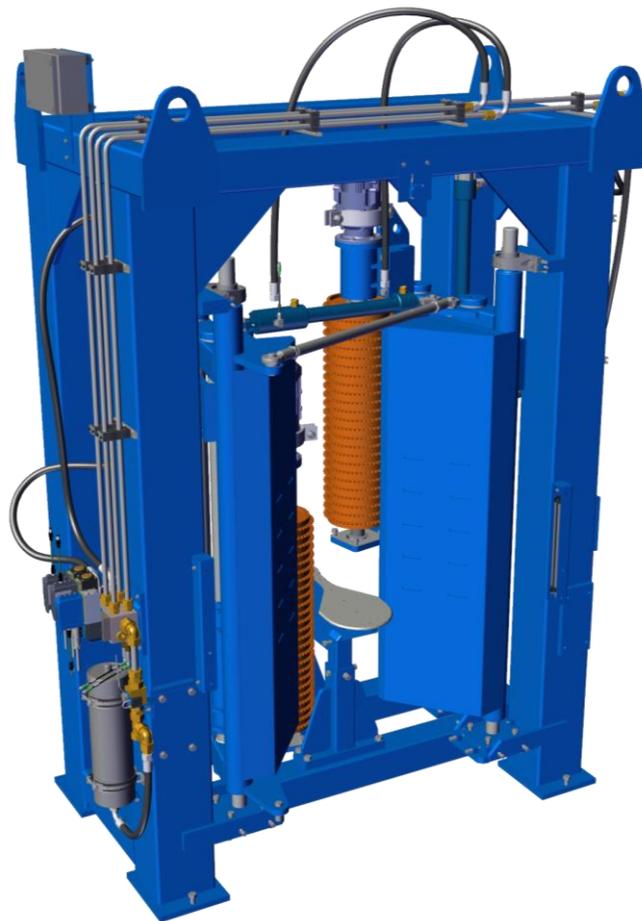

Log turner VLT-600 consists of a pair of serrated rollers with servo-hydraulic centring and separate drives. The rollers are mounted on centring frames which are movable vertically, i.e. up and down via a guide system with servo-hydraulic cylinders performing the movement.

When turning, the rollers are moved up on the right side and down on the left side, depending on which direction the log is to be turned.

As an option, the rotary turner can be equipped with Taigatech cameras for even more precise turning.




VLT-600

- Compact design taking up little space



Measurements

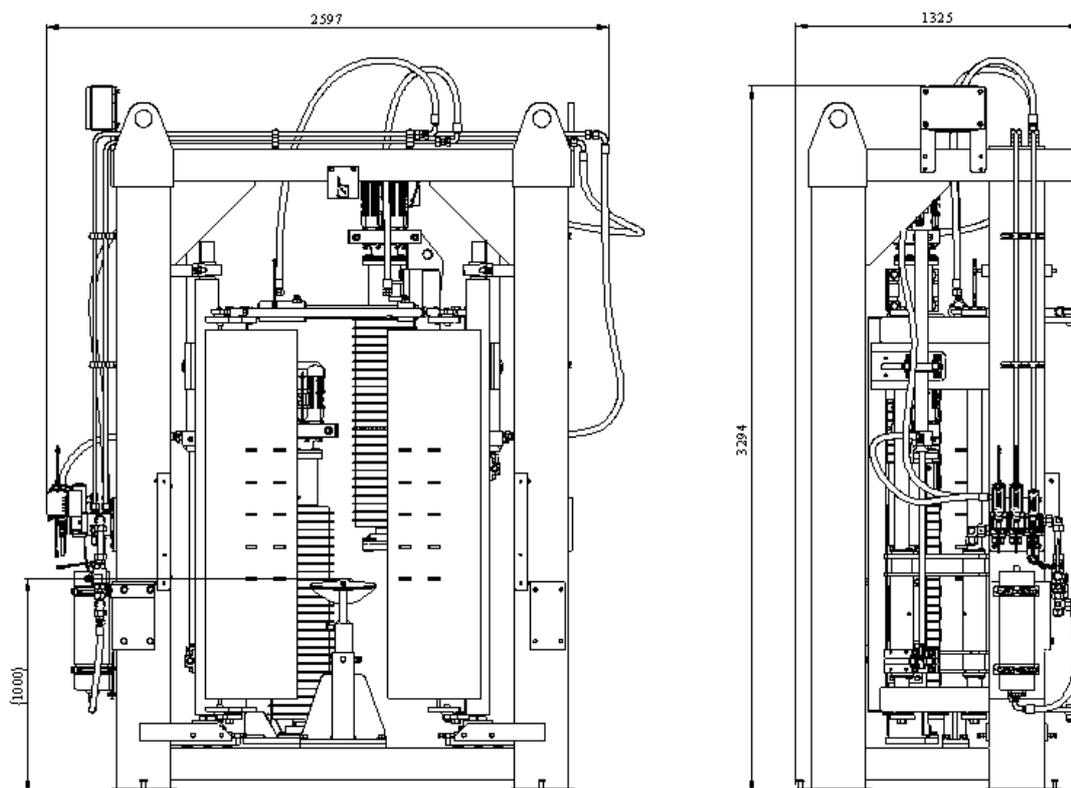

Technical data

Max feed speed.....	150 m/min
Min log length.....	2 m
Min log gap.....	app 0,3 m
Max/Min log diameter (enclosed).....	650/80 mm
Capacity.....	app 25 pcs/min
Weight.....	app 4 ton

Turning precision

Log diameter	8-16 cm	> 16 cm
Median deviation	4°	4°
Standard deviation (1S)	12°	10°

