


Mixing unit

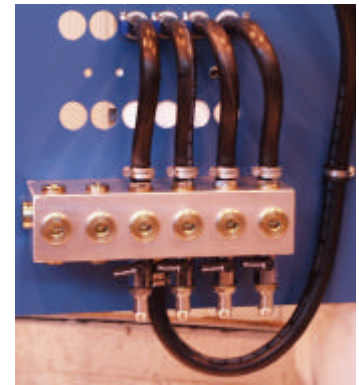

Connections on the back

The mixing unit has:


- water driven pump that admixes correct quantity of oil depending on the water flow
- flow meters for each sawblade or sawblade pack

With AriVislanda´s new mixing unit you will get a better mix of oil, water and air.

The unit has full flow control and the flow is separate adjustable for each sawblade or sawblade pack.

The mixing unit is available in standard design for up to 5 sawblades or sawblade pack.

Specification

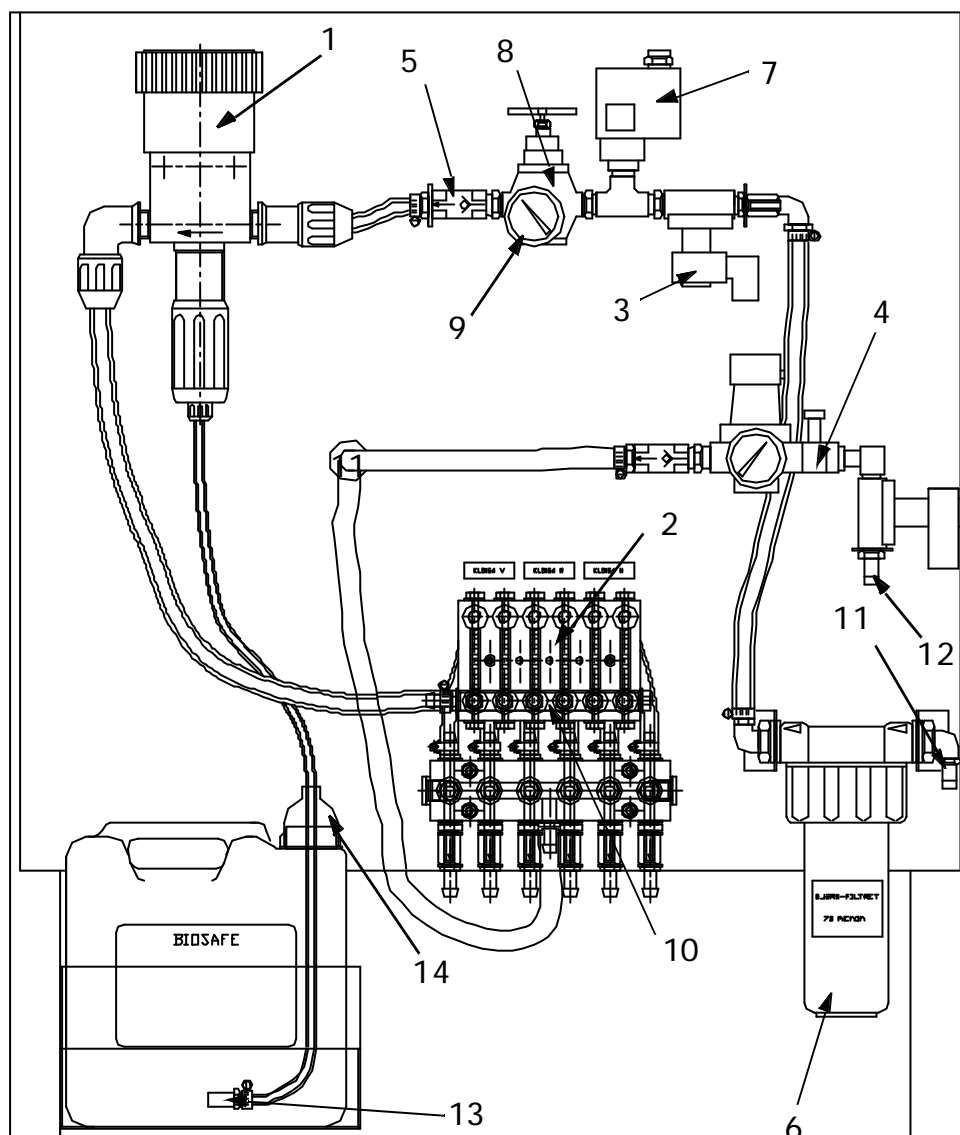

1. Pump
2. Flowmeter
3. Magnetic valve
4. Pressure regulator
5. Clack valve
6. Filter (washable)
7. Pressostat
8. Pressure regulator
9. Pressure gauge
10. Needle valve
11. Water input
12. Air input
13. Strainer
14. Rubber bellow

Air- and waterflow

Water pressure min 4.5 kp/cm²
 flow min 0.2 l/min per sawblade

Air pressure min 4.0 kp/cm²
 flow min 200 l/min per sawblade

Dimensions

Height 1250 mm
 Width 960 mm
 Deep 500 mm



Örnsköldsvik
 Tel: +46 660 868 00
 Fax: +46 660 199 22

Vislanda
 Tel: +46 472 343 45
 Fax: +46 472 343 49

E-mail: info@arivislanda.com
 Internet: www.arivislanda.com